

DESIGNED FOR PULMONARY FUNCTION TESTING

Low Resistance
Small Dead Space
Safe and Highly Efficient
Exceeds ATS & ERS Standards ¹



Available Sizes & Catalog Numbers

136900 (28 mm O.D.): Astra, Collins

136300 (30 mm O.D.): MIR, Micro Direct, Puritan Bennett, Vitalograph


136400 (34 mm O.D.): Jaeger

136500 (35 mm O.D.): SensorMedics, Cybermedic, Spirolink

136600 (36 mm O.D.): MGC Diagnostics (MedGraphics)

136700 (31 mm O.D.): Cosmed

Pulmonary Function Test Kits: PFT Kits with a disposable rubber mouthpiece and/or rubber nose clips are available for 30, 35 and 36 mm VBMax S-Series filters.

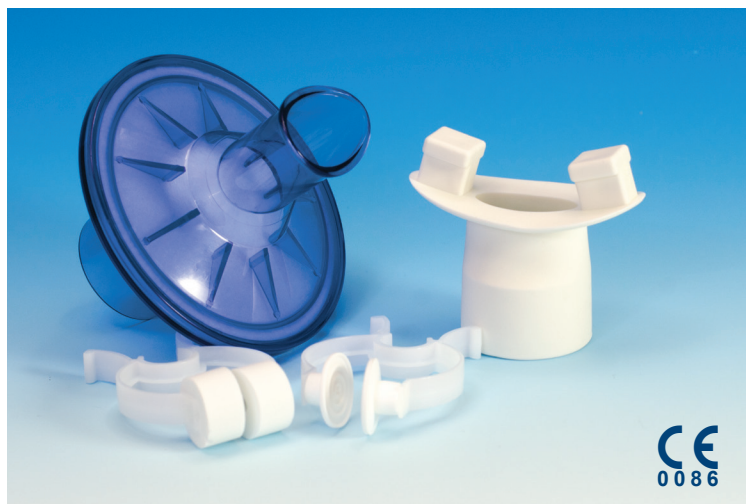

VBMax™ PFT Filter Technical Data

- Bacterial-viral filter
- For single patient only
- Hydrophobic, electrostatic filter media
- Bacterial filtration efficiency: > 99.999%
- Viral filtration efficiency: > 99.99%
- Resistance to flow:
 - 0.75 cm H₂O L•sec⁻¹ @ 14 L•sec⁻¹
 - 0.66 cm H₂O L•sec⁻¹ @ 12 L•sec⁻¹
- Effective dead space: 45 mL
- Available in 30 mm, 31 mm, 35 mm, 36 mm

Quality Assurance

VBMax™ PFT filters are manufactured under the strict standards of ISO 13485:2003, FDA Quality Systems Regulations (21 CFR Part 820), EU Medical Device Directive and Canada Medical Device Regulations (SOR/98-282).

1. *Eur Respir J* 2005; 26: 319-338

* VBMax™ PFT S-Series Filter 35 mm O.D. is pictured above.



A-M Systems Headquarters

131 Business Park Loop
Sequim, WA 98382
U.S.A.

Tel: +1 (360) 683-8300
Fax: +1 (360) 683-3525

<http://www.a-msystems.com>
<http://blog.a-msystems.com>
E-Mail: sales@a-msystems.com

